




# SW-2402RT

24-Port 100/10M Nway Switch + 2-Port Giga / 19"  
Rack-Mount, Real-Tek

Pheenet SW-2402RT, Full Duplex Ethernet with Gigabit Ethernet Switch, is a full-featured Ethernet Switch that provides Ethernet direct connection to local area network or individual PC with build-in 26-port Switch. SW-2402RT uses advanced Realtek Ethernet chipset solution with complete set of industry standard features for high-speed Internet access. SW-2402RT offers easy installation and cost-effective connection for corporate, office or government use.

## APPLICATION

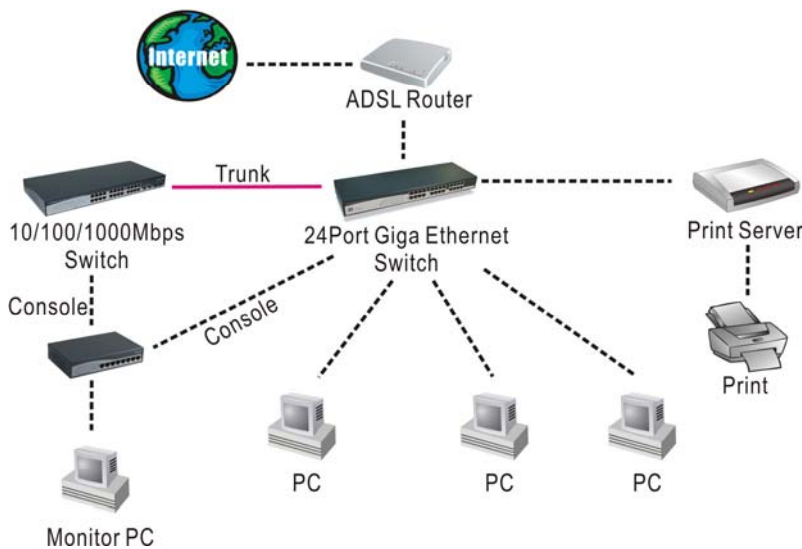

## Features

1. Supports 24 10M/100M auto-detect Half/Full duplex switching ports
2. Supports 2 10M/100M/1000M auto-detect Full duplex switching ports
3. Supports Store & Forward architecture
4. Supports TP interface Auto MDIX function for auto TX/RX swap

## Specification

Industrial Standard	
Standard	IEEE 802.3 10Base-T IEEE 802.3u 100Base-TX IEEE 802.3ab 1000Base-T IEEE 802.3x Full Duplex Flow Control
Network Media	Ethernet:2-pair UTP Cat.3,4,5, up to 100M

	Fast Ethernet:2-pair UTP Cat.5,up to 100M Gigabit Ethernet:4-pair UTP Cat.5 , up to 1000M
Interface	24 x 100Base-TX Auto-MDI/MDI-X ports with Fast Ethernet 2 x 1000Base-T Auto-MDI/MDI-X ports with Gigabit Ethernet
Data Transfer Rates	10Mbps and 100Mbps on 24 RJ-45 ports 10Mbps, 100Mbps and 1000Mbps on 2 Gigabit Ethernet ports
<b>Hardware</b>	
Mac Address Table	8K
Buffer Memory	2.5MB
Switch Fabric	8.8Gbps
Packet Forwarding	6.54Mpps
Connector	RJ-45 x 26
Power Consumption	22W
Power Supply	AC 100~240V 50/60Hz internal universal power
Dimensions (app.)	440mm (length) x 141mm (width) x 44mm (height)
Net Weight (app.)	1500g
Environment	Operating Temperature : 0°C ~ 40°C (32° ~ 104°F) ambient Humidity : 10 % ~ 90 % (non-condensing) Storage Temperature : -10°C ~ 55°C (14° ~ 131°F)
Regulations	FCC part 15 Class A, CE, RoHS compliant

## PheeNet Technology Corp.

Rm. 3, 20F, NO. 79, Hsin Tai Wu Rd., Sec. 1,  
Hsi-Chih, Taipei, Taiwan  
<http://www.pheenet.com>  
TEL:886-2-26982011 FAX:886-2-26981421

